





KT-STS SOFT TOUCH SERIES: READY MADE OR HALF KNOCK DOWN

Specialty Custom Pocket Door Wood Frames Built With Clearances To Operate With The New Spring Loaded Auto Return For Pocket Doors

KT25 frame RM or HKD: 100 lbs (45 kg) • KT28 frame RM or HKD: 150 lbs (60 kg) • KT40 frame RM or HKD: 220 lbs (100 kg)

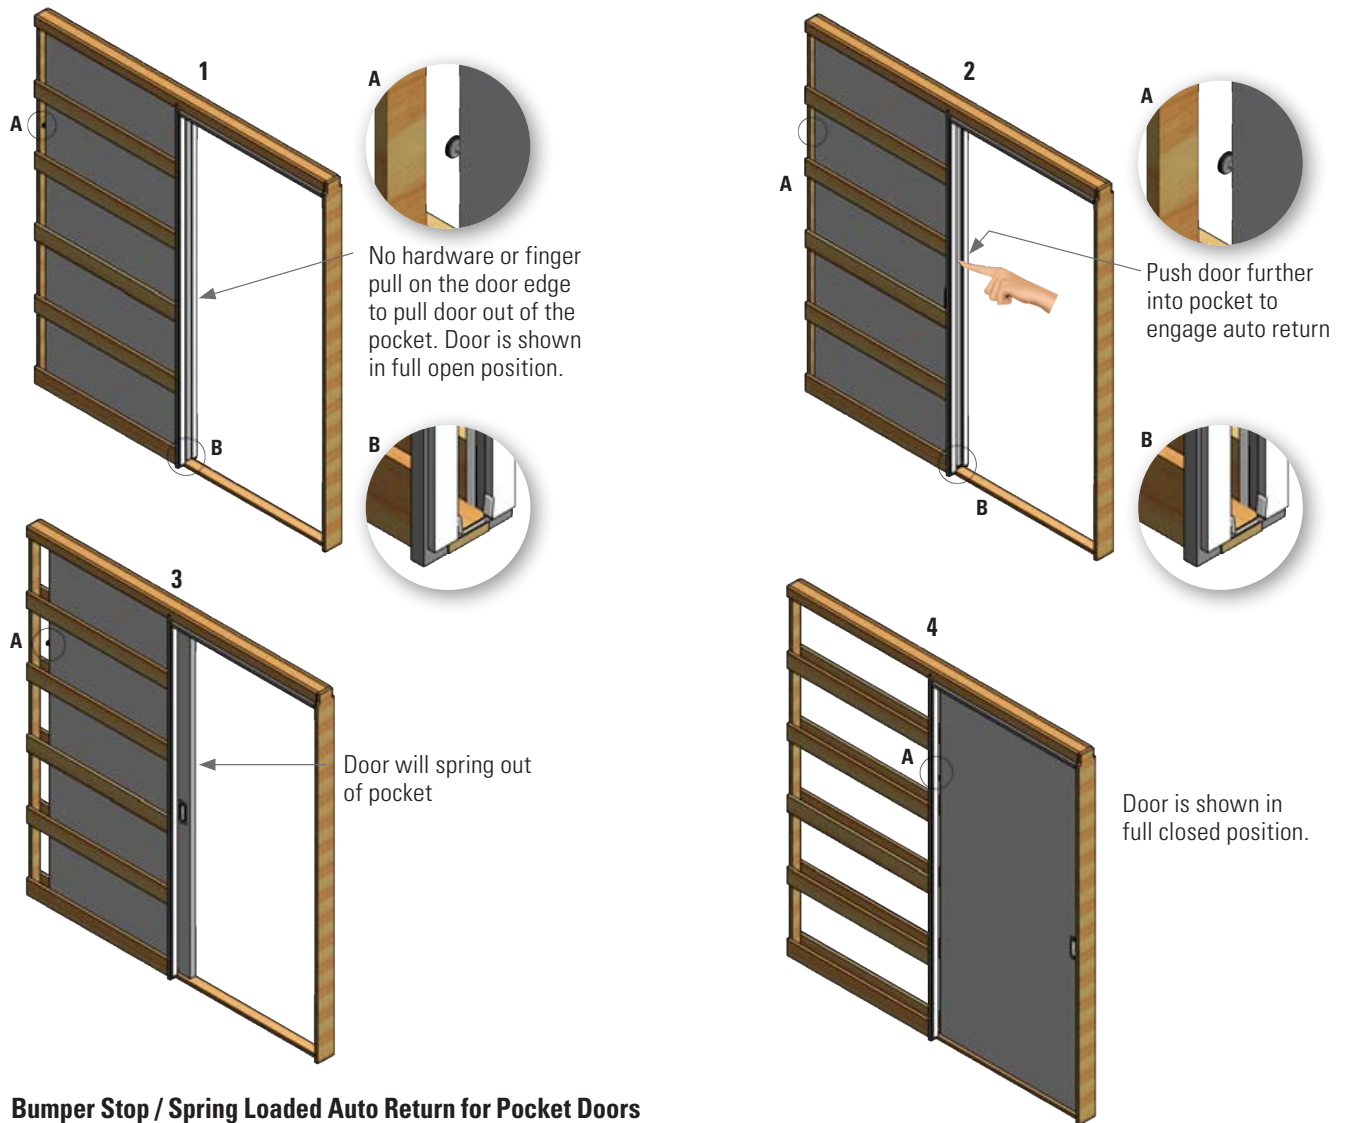

Bumper Stop / Spring Loaded Auto Return for Pocket Doors


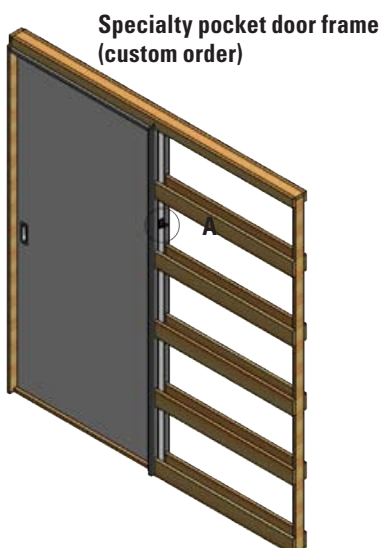


How does the auto return work?

If your pocket door does not have hardware on the edge of the door to pull the door out of the pocket, simply push the door further into the pocket and the auto return will spring the door out of the pocket.

If you choose to use the spring loaded auto return, then the frame is built wider than a standard frame. The wider frame will accommodate the gaping needed for the auto return feature.

PLEASE NOTE: The Soft Touch Auto Return Spring loaded plunger can only be installed after door is hung and before drywall is installed.

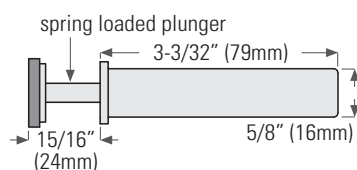

KT172-40 For doors up to 40 lbs. (18 kg)

KT172-80 For doors up to 80 lbs. (36 kg)

Bore hole size 11/16" (17mm) x 3-1/4" (83mm)

Location of hole is 3" (76mm) up from center of door