


KT-ST5 SOFT TOUCH SERIES: Specialty and Standard Pocket Door Wood Frame Selection

Specialty pocket door frame (custom order)

Bumper Stop / Spring Loaded Auto Return for Pocket Doors


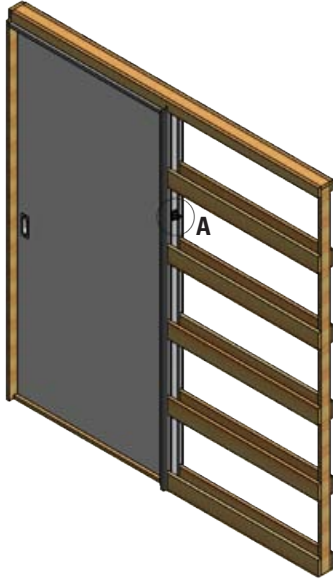


How does the auto return work?

If your pocket door does not have hardware on the edge of the door to pull the door out of the pocket, simply push the door further into the pocket and the auto return will spring the door out of the pocket.

If you choose to use the spring loaded auto return, then the frame is built wider than a standard frame. The wider frame will accommodate the gaping needed for the auto return feature.

PLEASE NOTE: The Soft Touch Auto Return Spring loaded plunger can only be installed after door is hung and before drywall is installed.

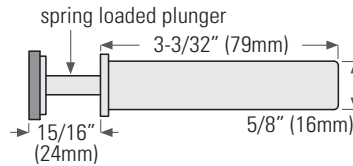


KT172-40 For doors up to 40 lbs. (18 kg)

KT172-80 For doors up to 80 lbs. (36 kg)


Bore hole size 11/16" (17mm) x 3-1/4" (83mm)

Location of hole is 3" (76mm) up from center of door

Specialty Pocket Door Frame With Plywood One Side (custom order)

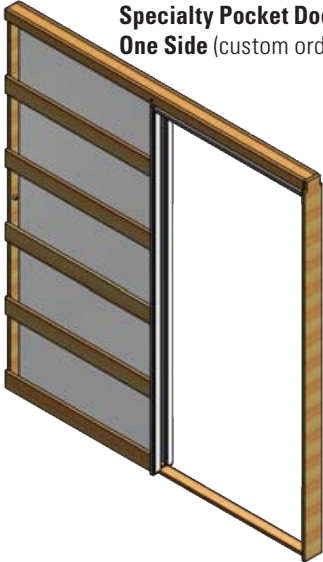


Specialty Pocket Door Frame With Plywood Both Sides (custom order)

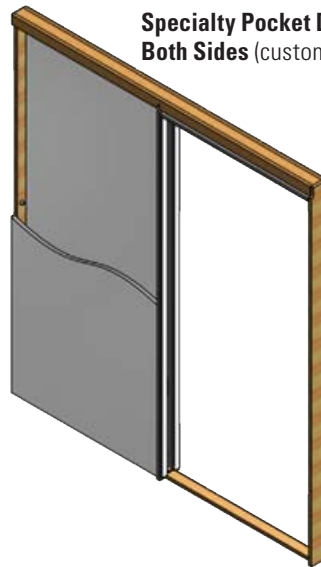


This custom frame has plywood on both sides for strength and allows towel bars, grab bars and cabinets to be installed on the pocket frame wall without compromising the integrity of the frame and wall.

Standard Pocket Door Frame (RM)

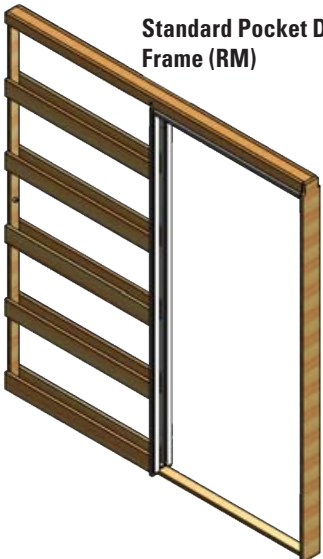

Standard Biparting Pocket Door Frame

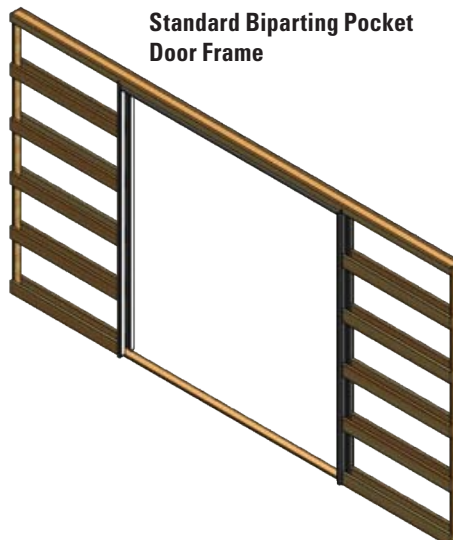

Standard Pocket Door Frame (HKD)

