


KrisTrack® KT42 Bi-pass door track & hardware

INSTALLATION INSTRUCTIONS

1. Size Doors

Trim doors 2-1/4" less than opening height for 1/2" floor clearance. Increase if more floor clearance is required.

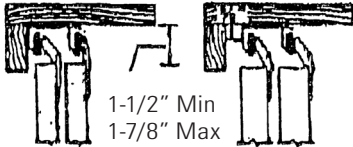

3/4" Doors 1" & 1-3/8" Doors

Non Fascia Track KT42 Aluminum Track


MAXIMUM DOOR WEIGHT:	60 lbs (27 kg) = 1 hanger
MIN & MAX DOOR THICKNESS:	3/4" (19mm) to 1-3/8" (35mm)
VERTICAL ADJUSTMENT:	3/8" (9.5mm)

2. Install Track

Fasten track to header or ceiling backing with # 8 screws. See details for proper track/fascia spacing.


3. Attach Hangers

Fasten to back of doors, 1-1/2" in from edge as shown. Locate screws at top of slots for maximum adjustment.

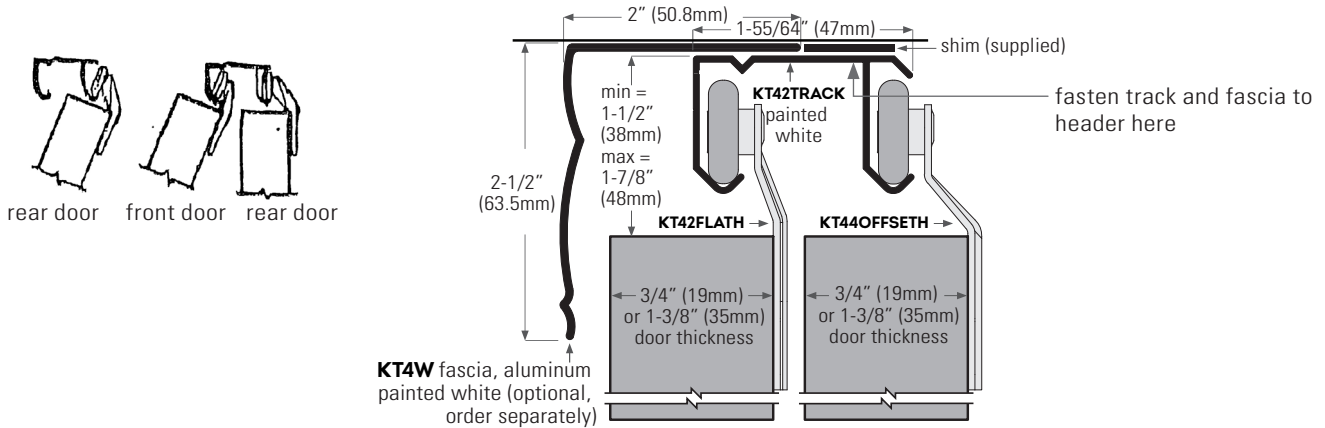

4. Hang Doors & Adjust

Install rear door first. Tilt bottom of door out, lift and engage wheels in track. To adjust, loosen screws slightly and raise or lower by inserting screwdriver into adjusting slot.



Install Floor Guide

Slide both doors to the same side of opening. Assemble centre guide on base as shown and plumb face of front door in opening.



**ALL DRAWINGS
NO SCALE**

Head Office & Manufacturing Centre - Vancouver, Canada 7470 Buller Avenue, Burnaby, B.C. V5J 4S5 Canada

Ph: (604) 451-1080 • Fax: (604) 451-1140 • info@theDSgroup.com • Toll free numbers Ph: 1-888-520-9009 Fax: 1-800-567-2887

Branch Offices & Distribution Centres

Toronto, Canada & Los Angeles, USA

Eclipse Architectural® Corporate Showrooms

Vancouver & Toronto, Canada • Los Angeles, California, USA

THE DS GROUP IS THE BRAND IMAGE OF A.K. DRAFT SEAL LTD.